
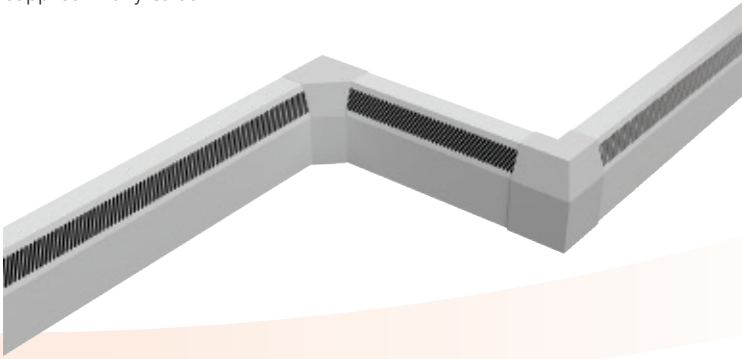




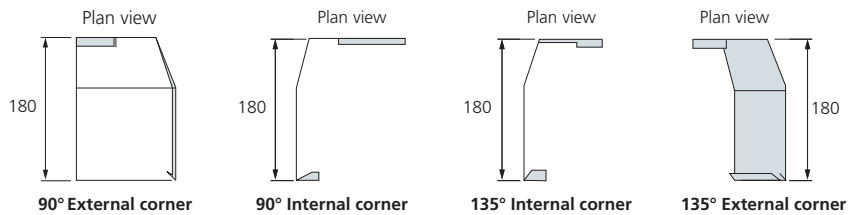
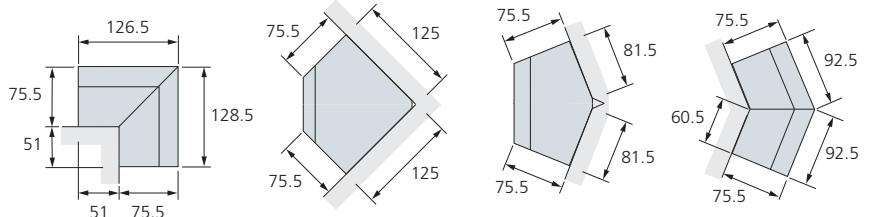
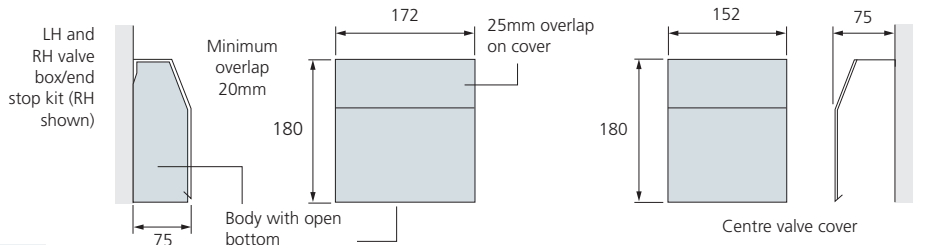
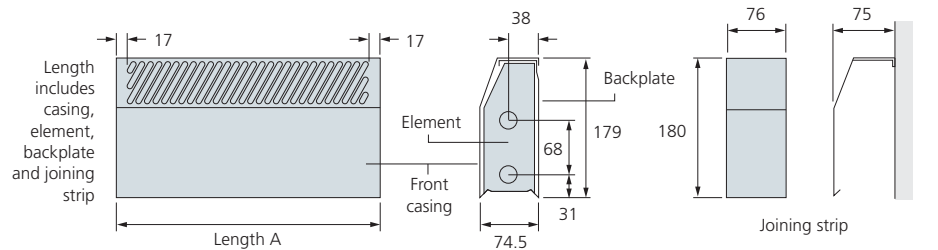
Sureline®

The Sureline® provides gentle, discreet and efficient low-level warmth and is the ideal heating solution for areas where wall space is limited - rooms such as showrooms or waiting areas. Simple to install along the skirting in any room, Sureline® is an efficient natural convector that provides discreet heating. Supplied as standard in white but can be supplied in any colour.



	Flow Rate L/h (G/h)	Heat Output															
		Btu/h/m @ average water temperature						W/m @ average water temperature									
		50°C	55°C	60°C	65°C	70°C	75°C	80°C	50°C	55°C	60°C	65°C	70°C	75°C	80°C		
 Two supplies - Parallel	920 (200)	1310	1570	1820	2070	2300	2560	2810	380	460	530	610	670	750	820		
 Bottom supply - Top return	920 (200)	1030	1250	1460	1710	1920	2140	2330	300	370	430	500	560	630	680		

All heat outputs relate to 1 metre length



All dimensions in mm

Model	Length A (mm)
Sureline 2000	2000
Sureline 1500	1500
Sureline 1000	1000
Sureline 500	500

* casing only

*We recommended the use of finger guards in installations where infants have access to the underside of Sureline.

Sureline®

Finish

Outer casing 0.7mm zinc coated steel. Polyester powder-coated. Paint specification: textured white BS 4800 00A01 18% gloss. Each length includes casing, element, backplate and joining strip. Casing only includes casing, backplate and joining strip

Installation

- Minimum clearance above floor 50mm
- Flow and return connections 22mm copper
- Designed for system pressures up to 10 bar
- Suitable for two pipe central heating systems only

Attachments

Casing only (1000mm)

LH valve box/end cap kit	RH valve box/end cap kit
Centre valve colour	90° internal cover
90° external cover	135° internal cover
135° external cover	Finger guard 500 (500mm)
Finger guard 1000 (1000mm)	Element (1000mm)

Customised requirements

We are able to offer casings painted in any colour. Price and availability will be confirmed at the time of order