

# Multivector®



Low level wall mounted fan convector with Smart Controls developed for use with heat pumps



## Features

- Energy efficient EC motor
- Ideal for use with heat pumps
- Low water content enabling fast response
- Two pipe heating
- Low surface temperature compared to a radiator
- Smart Control – time, temperature and speed control
- App – when paired with UG600 gateway
- 3 selectable speed
- Designed and manufactured in the UK

## Applications

Ideal alternative/replacement for radiator.  
Domestic application: living areas, home office and hallway.  
Commercial Premises: classrooms, offices and waiting areas.

## Motor

EC only.

## Finish

Outer casing zinc coated steel.  
Polyester, powder coated RAL 9010.

## Installation

Suitable for two-pipe central heating systems.  
Minimum height above floor level 150mm.  
Maximum height above floor level 500mm.  
Pipework access holes on the rear and underside.  
Bleed valve accessible on removal of front casing.  
Unit must be earthed.

## Control

Flush mounted Smart Control: fan speed, time programming, temperature control and valve/actuator.  
App control - when used with UG600 gateway.

## Attachment

To utilise "Salus Smart Home" app a UG600 gateway must be installed and connected to the local network.

## Customised requirements

For bespoke specification, please contact us to discuss your requirements.


## Specification

To specify state: Low level wall mounted fan convector 970mm, 1170mm or 1370mm wide with EC motor with Time and Temperature control built in. As Smith's Multivector 970, 1170 or 1370

# Multivector®



Low level wall mounted fan convector with Smart Controls developed for use with heat pumps

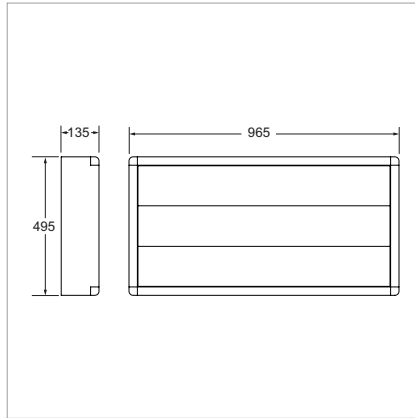

## Heat output

Model	Fan Speed	Heating Capacity - EWT °C / kW									Heating Flow Rate (l/h)	Sound level NR
		40°C	45°C	50°C	55°C	60°C	65°C	70°C	75°C	80°C		
MULTIVECTOR 970	LOW	0.51	0.62	0.74	0.85	0.97	1.10	1.24	1.37	1.50	340	26
	MEDIUM	0.70	0.82	0.94	1.06	1.18	1.38	1.59	1.79	1.99	340	32
	HIGH	0.91	1.11	1.30	1.50	1.69	1.89	2.09	2.29	2.48	340	37

BS4856; Methods for testing and rating fan coil units, unit heaters and unit coolers.  
 Tested with shown EWT & 18°C EAT.  
 Sound Level measured at SRL (Sound Research Laboratory Testing) in accordance with BS 4856-4:1997.

## Ordering guide

Listed below are the basic models. For all other variants please visit our website for the most up to date information.

Model	Packed Wt (kg)	Product Codes
MULTIVECTOR 970	22.5	HPAC36001
MULTIVECTOR 1170	COMING SOON	
MULTIVECTOR 1370	COMING SOON	

For bespoke specifications, including electric heating capability please contact us to discuss

As part our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated. Please visit our website for the most up to date information.

Issue 001 | September 2021