

Caspian® SL

Education | Healthcare | Places of worship | Leisure and sport | Office | Hospitality | Retail | Showroom | Industrial | Residential



Warm air is discharged at an upward 45° angle to avoid causing discomfort to people sitting adjacent to appliance and with chamfered profile to avoid sharp corners

Caspian fan convectors are both a practical and high quality heating solution for any commercial project

Incorporating the latest EC motor technology, which can result in running-cost savings as high as 70%, and with variable speed control as standard, the Caspian delivers heat quickly and quietly

It is possible to have master and slave Caspian fan convectors that integrate the entire range of EC Caspian products. Please contact either our sales team or technical team to ensure that this is correctly specified

Caspian fan convectors are compatible with most types of wet central heating systems, functioning equally efficiently with conventional boilers, biomass technology or ground or air source heat pumps

The airflow can be reversed so that the warm air is discharged from the lower vent. Please contact either our sales team or technical team to ensure that the correct inlet/discharge positioning is specified

Available with [Smart Control](#) and [Antibacterial paint](#)



Product Information

Motor

EC (BMS compliant).

Finish

Casing: zinc-coated steel 1.2mm .

Polyester powder-coated: white RAL 9010.

Available to special order in any colour and with anti-microbial or antibacterial paint.

Filter

Class G2, 100% polyester, non-washable.

Installation

Suitable for two-pipe central heating systems.

Maximum installation height for high or ceiling mounting - 4m to underside.

Pipework access holes on the rear and underside.

Key operated front access panels.

Bleed valve accessible on removal of front casing.

Unit must be earthed.

Commissioning

Check water is hot enough to activate the low temperature cut-out thermostat.

Controls

See accessories table.

Specification

To specify state:

Fan Convector with EC motor, in 1.2mm zinc coated steel, 660mm high and 595mm, 745mm, 895mm, 1195mm, 1495mm or 1795mm wide. With variable heat output controller. As Smith's Caspian SL 60, 75, 90, 120, 150, 180.

Technical Data

Heat output - EC

Model Reference	Fan Speed	Control Voltage VDC	40°C MWT	45°C MWT	50°C MWT	55°C MWT	60°C MWT	65°C MWT	70°C MWT	75°C MWT	80°C MWT
EC 60	Low	2.4	0.85	1.20	1.55	1.96	2.37	2.78	3.19	3.61	4.02
	Mid	3.7	1.13	1.62	2.10	2.58	3.06	3.55	4.03	4.51	5.00
	High	5.8	1.47	2.05	2.63	3.21	3.79	4.36	4.94	5.52	6.10
EC 75	Low	2.4	1.01	1.49	1.92	2.39	2.98	3.51	3.97	4.47	4.97
	Mid	3.7	1.50	2.00	2.38	2.98	3.57	4.16	4.75	5.34	5.94
	High	5.8	1.99	2.71	3.44	4.16	4.89	5.61	6.31	7.06	7.78
EC 90	Low	2.1	1.98	2.55	3.11	3.67	4.24	4.80	5.37	5.93	6.50
	Mid	3.5	2.80	3.58	4.36	5.14	5.91	6.69	7.47	8.25	9.03
	High	5.5	3.68	4.65	5.62	6.59	7.55	8.52	9.49	10.46	11.42
EC 120	Low	1.8	3.03	3.61	4.19	4.78	5.36	5.94	6.53	7.11	7.69
	Mid	3.3	3.91	4.87	5.82	6.78	7.74	8.70	9.65	10.61	11.57
	High	5.1	4.84	6.00	7.17	8.33	9.49	10.66	11.82	12.99	14.15
EC 150	Low	1.8	3.59	4.57	5.55	6.53	7.51	8.49	9.47	10.45	11.44
	Mid	2.6	4.77	6.10	7.43	8.76	10.08	11.41	12.74	14.07	15.39
	High	3.9	6.47	7.71	8.96	10.21	11.45	12.70	13.94	15.19	16.43
EC 180	Low	1.8	4.69	5.92	7.15	8.39	9.62	10.85	12.08	13.31	14.55
	Mid	2.7	4.93	7.15	9.38	11.60	13.82	16.05	18.27	20.49	22.72
	High	4.1	7.90	9.74	11.58	13.42	15.27	17.11	18.95	20.79	22.63

Model Reference	Fan Speed	Air Volume (m³/h)	Air Volume (l/s)	Specific Fan Power w/l/s	Power Consumption (W)	NR in typical room*	Hydraulic Resistance (KPA)	Nominal Weight (KG)	Water Capacity (L)
EC 60	Low	201.00	55.90	0.14	6.8	34.00	1.38	24.00	0.92
	Mid	290.50	80.75	0.26	13.6	41.50	1.69		
	High	380.00	105.60	0.32	27.3	49.50	2.00		
EC 75	Low	251.00	69.72	0.10	6.8	34.00	3.80	29.00	1.21
	Mid	349.00	96.94	0.14	13.6	41.50	4.69		
	High	475.00	131.94	0.21	27.3	49.97	5.82		
EC 90	Low	297.00	80.75	0.20	10.6	34.00	4.70	36.00	1.50
	Mid	450.50	124.38	0.34	24.8	41.50	5.85		
	High	604.00	168.00	0.40	50.6	49.97	7.00		
EC 120	Low	419.30	116.50	0.14	9.4	34.00	17.78	44.00	2.08
	Mid	549.65	152.68	0.26	22.8	42.00	20.59		
	High	680.00	188.89	0.34	45.2	49.96	23.40		
EC 150	Low	459.80	127.72	0.17	14.1	34.70	22.23	60.00	2.58
	Mid	598.10	166.14	0.35	24.6	41.50	29.46		
	High	736.40	205.56	0.47	43.2	49.38	36.69		
EC 180	Low	542.00	150.56	0.19	18.8	34.90	47.83	78.00	3.18
	Mid	690.00	191.67	0.40	35.2	41.50	60.76		
	High	838.00	232.78	0.55	62.4	49.00	73.70		

*a typical room is taken as a room with a volume of 173m³ and a reverberation time of 0.8 seconds at 500 Hz with one unit installed, situated against a wall or ceiling (radiating noise in a quartersphere). No allowance is made for attenuation provided by ceilings, enclosures or ductwork. Outputs based upon testing at EN442: 2014 using mean water temperature and an entering air temperature of 20°C with a 10°C temperature drop between flow and return.

Correction factors

Mean Water Temp °C		45 - 80			
Water Temperature drop °C		5	10	15	20
Entering Air Temperature °C	15	1.13	1.10	1.07	1.05
	18	1.08	1.05	1.02	0.99
	20	1.04	1.00	0.95	0.89
	25	0.93	0.91	0.89	0.86

Factors are approximate data based upon a standard coil.


How to calculate Mean Water Temperature

Mean water temperature (ΔT)

Flow temperature +
Return temperature

2

Mounting Options

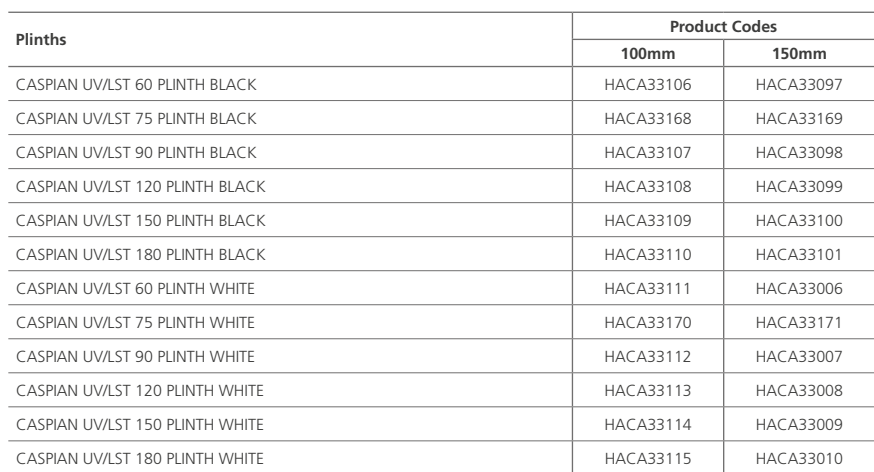

Smith's
A Swan Group Company