


Kitchen Heater

Installation, commissioning
and user manual



KHCH

Contents

Introduction	2
Declaration of conformity	3
Symbols used in this guide	3
Important safety and installation instructions	4
Product dimensions	5
Installation	6
Electrical connections	7
Commissioning	7
Fault finding	8
User Manual	
Important safety guidance	10
Introduction	11
Operation	11
Fault finding	12
Disposal	12

Introduction

The following items are included in the carton:

- Product complete with IEC mains cable.
- Fixing Screws (2)
- One pair flexible installation hoses.
- One stainless steel fascia grille (please remove plastic film before installation).
- One white fascia grille.

Accessory grilles which fit in place of standard grille are available in different colours and finishes. Please consult the price list for details. In the event of any items missing or visible damage, please contact us on +44 (0) 1245 324560.

Please leave this Installation and User Guide with the owner of the property.

Declaration of conformity

EC Declaration of conformity

We, Smith's Environmental Products Limited
1-2 Blackall Industrial Estate
South Woodham Ferrers
Chelmsford
Essex CM3 5UW
Tel: 01245 324900 Fax: 01245 324422

Declare under sole responsibility that the products:

Product name:
Space Saver

Product range:
KHCH, KHE2

Listed above conforms with the following
European Union directives:
Low Voltage Directive (73/23/EEC)
EMC Directive (89/336/EEC)
Pressure Equipment Directive (97/23/EC)
Machinery (98/37/EC)

Standards comply with the above directives.

Safety Directive Standards:
**EN 60335-2-80:2003 + A1:04 in conjunction
with EN 60335-1:2002 + A11:04 + A1:04 +
A12:06 + A2:06**
With UK deviations

This Declaration is made on behalf of Smith's
Environmental Products Limited

Symbols

This manual contains information and
prescriptions marked by the following symbols.



Ignoring these safety provisions
marked by the symbol "caution:
hazard" may endanger the safety of
people.



Ignoring these safety provisions
marked by the symbol "caution:
electricity" may endanger the
safety of people, as well as the
integrity of things.



The removal of the screws can
cause the output of hot fluids
under high pressure from heating
system. Drain the system or close
the isolating valves.



High temperature surface. Take
utmost care to prevent people
from getting in contact with the
hot surfaces of the appliance.

Important safety and installation instructions

Prior to installation, read these installation and operating instructions. The installation and operation should also be in accordance with national regulations and accepted codes of good practice.



This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

To guard against injury, basic safety precautions should be observed, including the following:

1. Read and follow all safety instructions and all the important notices on the appliance before installing, using and maintaining the appliance. Failure to do so may cause personal injury or damage to the appliance or installation.
2. Always disconnect electrical supply before putting on or taking off parts and whilst the equipment is being installed, maintained or handled. Never work with bare feet and/or with wet hands.
3. To avoid possible electric shock, special care should be taken since water is used with electrical equipment. Carefully examine the appliance before and after installation. Do not operate the appliance if it has a damaged supply cord or enclosure, or if it is malfunctioning or it is dropped or damaged in any manner. Inspect the appliance periodically.



The appliance should not be electrically supplied if there is water on parts not intended to be wet.

4. Risk of scalding. To avoid injury before any servicing operation wait until the water has cooled inside the appliance. Do not touch the fluid or the appliance when temperature is higher than 60°C.



5. Improper use.
This is an appliance to be used in heating systems with clean water without abrasive particles.



Do not use this appliance:

- With liquids other than water (e.g. flammable liquids, etc.) (EN60335-2-51);
- In locations where special conditions prevail, such as the presence of a corrosive or explosive atmosphere (dust, vapour or gas) (EN60335-2-51);
- For other than intended use.

6. Installation.

The appliance must be mounted in a stable/fixed position in a dry, well ventilated, frost-free, waterproof and protected place, with sufficient ventilation around it. Make sure that the appliance is securely and correctly installed before operating it and that there is enough room around it for maintenance operations, dismantling, checking for free inspection.

The maximum ambient temperature at which the appliance is to be used is 40°C (EN60335-2-51).



7. Electric connection

IMPORTANT: Connection to the power supply must be effected by means of an IEC mains cable which is fitted with a plug-type connection or a two pole isolating switch with a minimum contact opening of 3 mm.

Electrical connection must be carried out by a qualified electrician and in accordance with local regulations and both data on the name-plate and the appropriate diagram inside the terminal box cover.

Follow all safety standards.


8. Connect the appliance only to a mains supply protected by a Residual Current Device (RCD or Ground-Fault Circuit-Interrupter) with a rated residual operating current not exceeding 30mA.
9. Prior to any modification being made to the equipment, it must be agreed with and authorised by the manufacturer. Original spare parts and accessories authorised by the manufacturer are integral part contributing to the safety of the equipment and of the machines. The use of non original components or accessories may endanger the safety and causes the termination of the warranty. Safe operation is only assured for the applications and conditions described in Application of this manual.

Non-observance of the safety instructions results in the loss of any claims to damages.

The indicated limit values are binding and cannot be exceeded for any reason whatsoever.

KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.


Product dimensions

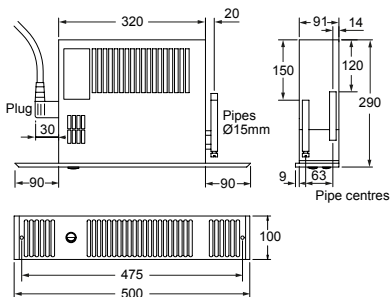

Installation

1. Cut the opening in the plinth

- To ensure adequate airflow, a minimum clearance of 20mm between the top of the product and any shelving is essential.
- To avoid the possibility of vibration, this product must be installed on a flat, even surface.
- There must be no rear access to the product after completion of the installation.

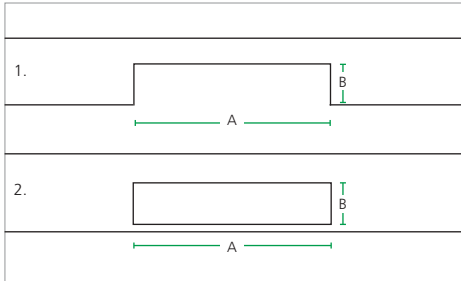


- We recommend the use of a knee pad when installing this product.
- Cut the opening in the plinth to the size shown in the table. Use method 1 or 2.

Model	Width A (mm)	Height B* (mm)
KHCH	465	96

* The overall height of the grille is 100mm. Use care when cutting the opening.


2. Fit isolating valves (not supplied)

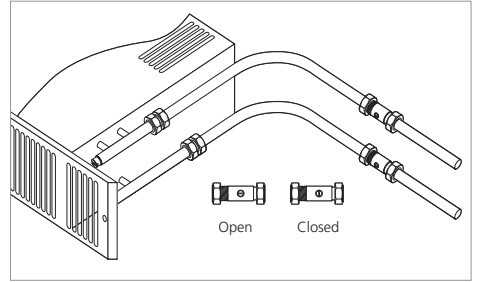


- Fit isolating valves (not supplied) to the system flow and return pipes. In order to achieve the highest level of performance we recommend full bore valves.
 - Failure to fit isolating valves may mean that the product is not serviceable in the event of failure.
 - Connect the flexible hoses between system pipework and heater. Please ensure the flexible hoses are not kinked.
 - Open the isolating valves and check for leaks.
- N.B. either pipe may be used on flow or return.

The Flexible installation hoses supplied are suitable for use with either 15mm diameter copper pipe or 15mm cross-linked polythene barrier pipe to BS 7291. The only type of fitting approved to connect onto the heater are compression fittings.

3. Vent air through bleed

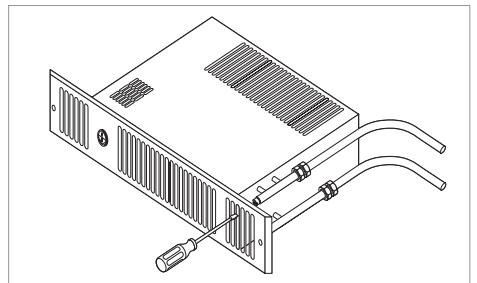


4. Connection to power supply

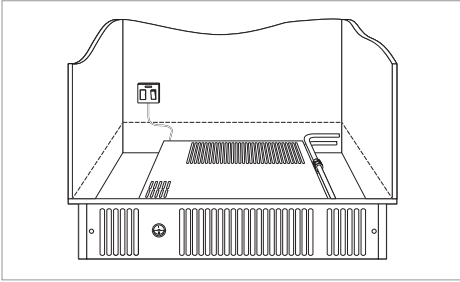

- Isolate electrical supply and connect the heater's electric cable to the fused spur (3A).
- Ensure the fused spur is not directly above the heater and is accessible after installation is complete.


Space Saver is classified as a fixed appliance and electrical connection should be via a double pole 3A fused spur with a minimum contact gap of 3mm. If the pre-wired mains cable is damaged, it must be replaced by either the manufacturer, its service agent or similarly qualified persons. The appliance must be earthed.

5. Position heater

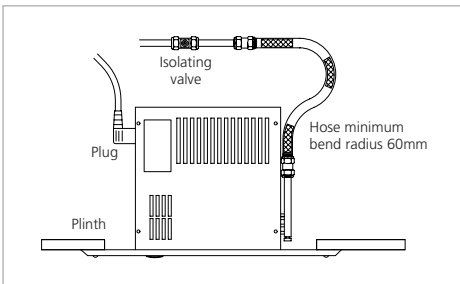

Position the heater, making sure the flexible hoses are not kinked and the electrical cable is not snagged.


6. Fix to plinth

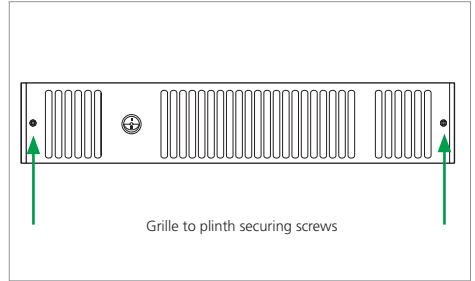

Fix the heater to the plinth using the screws provided and by means of the holes positioned to left and right hand sides.

Commissioning

1. Turn on the electrical supply at the fused spur.
2. Turn on the central heating system and set any room thermostats to maximum.

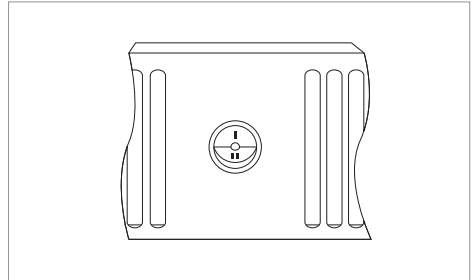

3. Set the heat output switch to I.
4. Within a few minutes (10-15 mins) the fan should run and heat will flow.
5. Balance the central heating system if Space Saver is installed on the same circuit as panel radiators.
6. When the installation is working correctly, remember to reset any room thermostat(s) to its normal setting.

Fault finding


In the event of any difficulty, please contact us on +44 (0) 1245 324560.

It will be more helpful if you do not remove the product from the central heating system.

Fault	Checking/Solution
Fan does not run on any switch setting	Check the power supply is switched ON Check fuse in fused spur Check the wiring connections at the fused spur
No heat output on settings I and II	Check the power supply is switched ON If possible, check that both the copper pipes on the side of the unit are hot Ensure that the flexible connections are not kinked If fitted, ensure any room thermostats are calling for heat Balance the central heating system if installed on same circuit as panel radiators and increase the circulating pump speed if required Increase the boiler water temperature Check the service valves are open Bleed air from appliance

Kitchen Heater

User manual

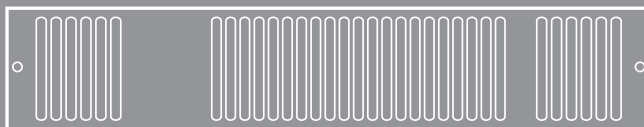

KHCH

Important safety and installation instructions

Please read this user manual before operating this appliance. The operation should also be in accordance with national regulations and accepted codes of good practice.



This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

To guard against injury, basic safety precautions should be observed, including the following:

1. Read and follow all safety instructions and all the important notices on the appliance before installing, using and maintaining the appliance. Failure to do so may cause personal injury or damage to the appliance or installation.
2. Always disconnect electrical supply before putting on or taking off parts and whilst the equipment is being installed, maintained or handled. Never work with bare feet and/or with wet hands.
3. To avoid possible electric shock, special care should be taken since water is used with electrical equipment. Carefully examine the appliance before and after installation. Do not operate the appliance if it has a damaged supply cord or enclosure, or if it is malfunctioning or it is dropped or damaged in any manner. Inspect the appliance periodically.



The appliance should not be electrically supplied if there is water on parts not intended to be wet.



4. Risk of scalding. To avoid injury before any servicing operation wait until the water has cooled inside the appliance. Do not touch the fluid or the appliance when temperature is higher than 60°C.



5. Improper use.
This is an appliance to be used in heating systems with clean water without abrasive particles.

Do not use this appliance:

- With liquids other than water (e.g. flammable liquids, etc.) (EN60335-2-51);
- In locations where special conditions prevail, such as the presence of a corrosive or explosive atmosphere (dust, vapour or gas) (EN60335-2-51);
- For other than intended use.

Non-observance of the safety instructions results in the loss of any claims to damages.


The indicated limit values are binding and cannot be exceeded for any reason whatsoever.

KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.

How it works

Hot water from your central heating system passes through a heat exchanger transferring its heat to the aluminium fins. Cooler air is drawn in by the fan and heated as it passes through the heat exchanger before being discharged gently back into the room. This not only gives a more even temperature spread, but will heat up a room quicker than a traditional panel radiator.


Space Saver includes an internal thermostat that prevents the fan from operating until the central heating system water passing through the heat exchanger reaches 38°C. This prevents the Space Saver circulating cooler air at start up.

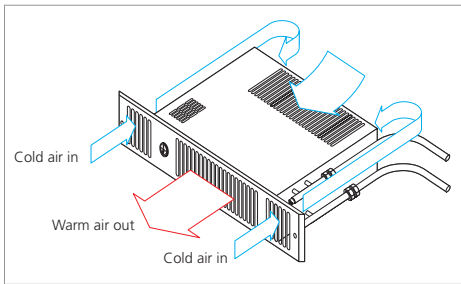

How to operate

Your Space Saver fan convector is designed to operate as part of your central heating system in the same way as a panel radiator. Providing the heat output switch is left in Position 1, your Space Saver will switch on and off automatically with your central heating system.

Providing the water temperature in the system is more than 38°C and the thermostat controlling your central heating system is calling for heat, your Space Saver will switch on.

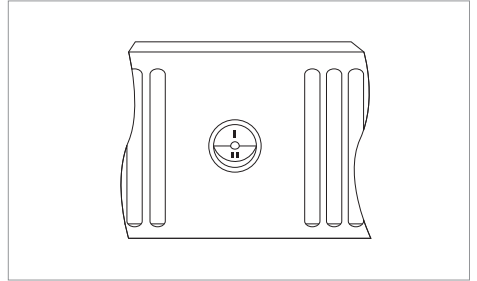

Fault finding

This Space Saver is covered by a free 5-year parts and labour guarantee.
Please refer to the Fault finding table below for advice.
In the event of difficulty, please contact us on +44 (0) 1245 324560.

It will be helpful if you do not disconnect the Space Saver from your central heating system.

Fault	Checking/Solution
Fan does not run on any switch setting	<p>Check the power supply is switched ON</p> <p>Check fuse in fused spur</p> <p>Check the wiring connections at the fused spur</p>
No heat output on settings I and II	<p>Check the power supply is switched ON</p> <p>If possible, check that both the copper pipes on the side of the unit are hot</p> <p>Ensure that the flexible connections are not kinked</p> <p>If fitted, ensure any room thermostats are calling for heat</p> <p>Balance the central heating system if installed on same circuit as panel radiators and increase the circulating pump speed if required</p> <p>Increase the boiler water temperature</p> <p>Check the service valves are open</p> <p>Bleed air from appliance</p>

Disposal

Products with this symbol (crossed out wheelie bin) cannot be disposed as household waste. Old electrical and electronic equipment must be recycled at a facility capable of handling these products and their waste by-products. If you are purchasing replacement equipment your retailer may offer a 'take back' scheme, or will be able to give details of the nearest approved authorised treatment facility. Proper recycling and waste disposal will help conserve resources whilst preventing detrimental effects on our health and the environment.

WEEE Registered Code: WEE/ED0093VW



Approved CQS ISO
9001:2015



ISO 14001
Certified No. 184201002



Manufactured by:

Smith's Environmental Products Ltd
Blackall Industrial Estate, South Woodham Ferrers,
Chelmsford, Essex CM3 5UW

Tel: +44 (0) 1245 324900

Fax: +44 (0) 1245 324422

SmithsEP.co.uk

info@SmithsEP.co.uk

@SmithsEP_UK

#ThinkSmiths

Issue 001 | 85-0070 | July 2025

As part our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated.