

EasiLink


Installation Guide

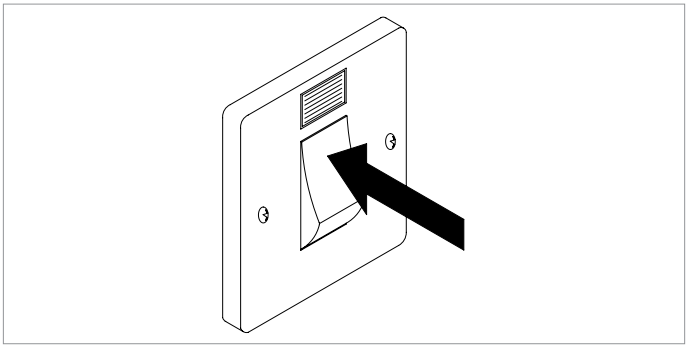


1. Install batteries in the controller.
Switch OFF the mains isolator for the heater.

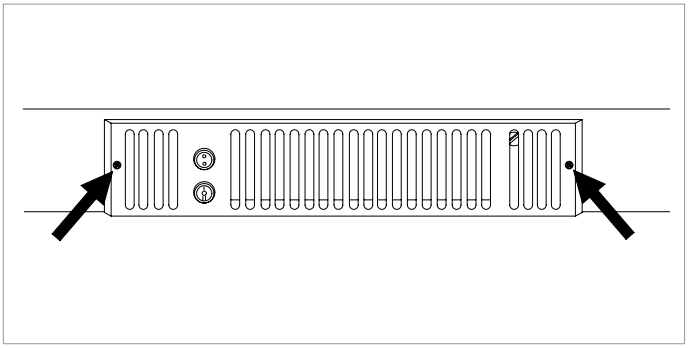


2. Undo the retaining screws for the heater.

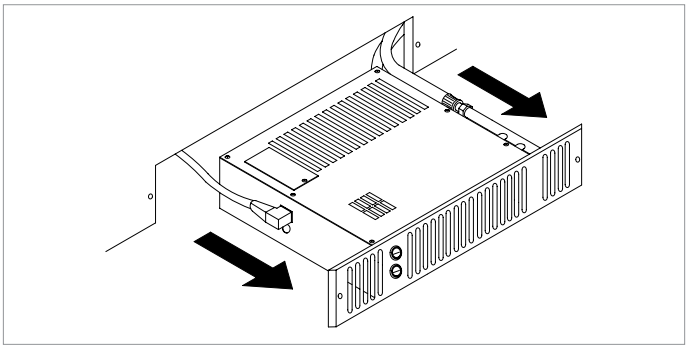


3. Withdraw the unit from the plinth.

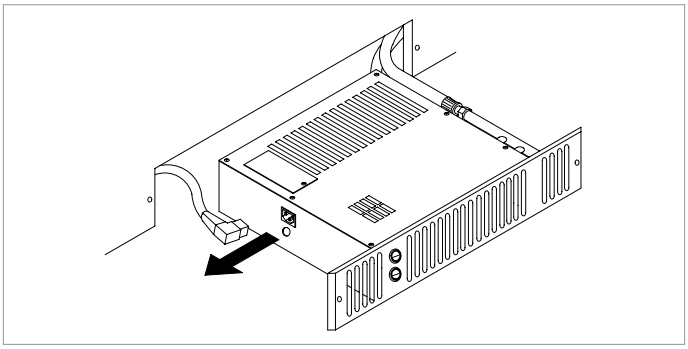


4. Disconnect the power plug from the side of the unit.

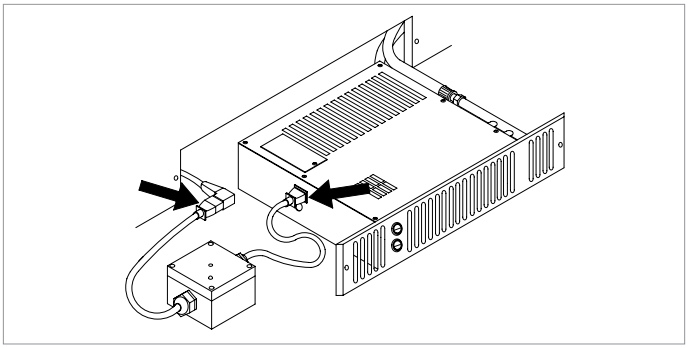


5. Connect the receiver unit between the power cable and the heater.

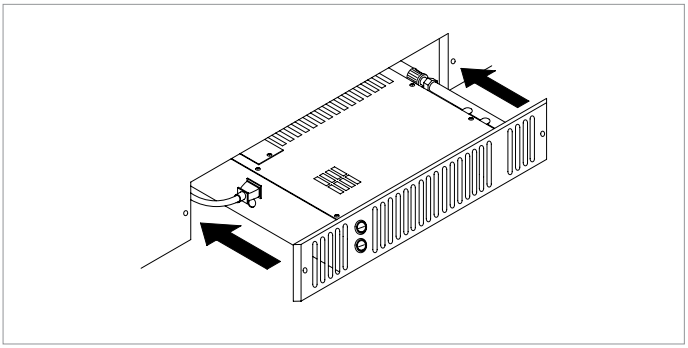

6. Push everything back into the plinth and secure with screws.

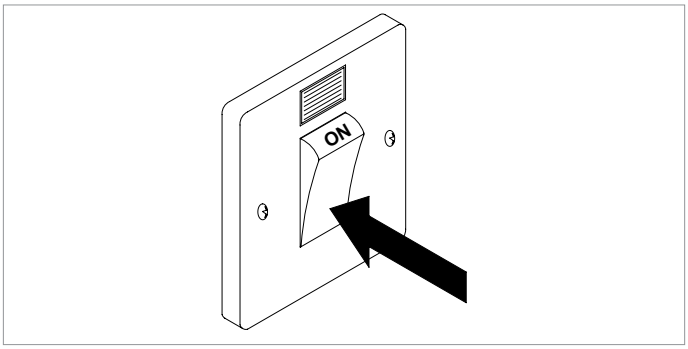

7. Turn ON the mains isolator for the heater.

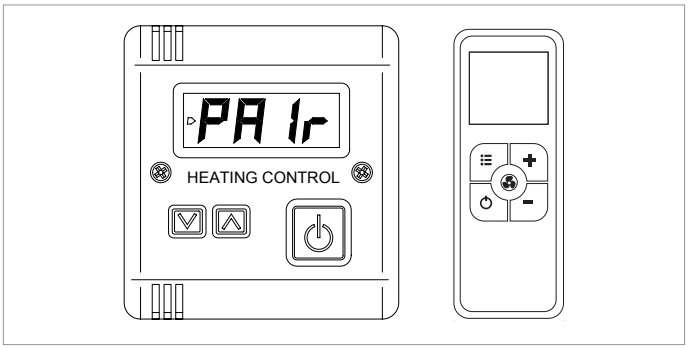

8. Within 20 seconds of turning on the power, carry out the pairing procedure as per the controller instructions.

As part our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated. Please visit our website for the most up to date information.

Issue 004 | 85-0066 | October 2026

+44 (0) 1245 324 900 | sales@smithsep.co.uk | SmithsEP.co.uk

Smith's
A Swan Group Company