


# Air Curtains - S2/S2 Metallic Series



Smith's S2 and S2 metallic series of electric air curtains are ideal for smaller commercial spaces such as pavilions, small retail outlets, mini markets and pick-up windows

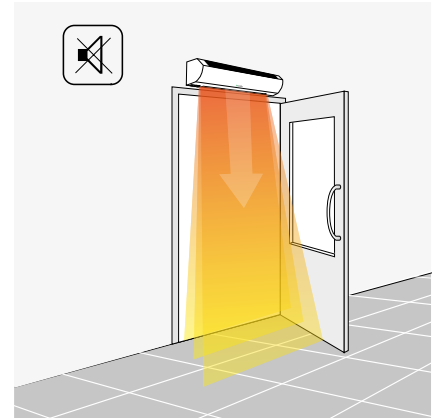

## Features

- These stylish units deliver energy efficient and quiet protection against cold air from outside
- Innovative noise reduction system
- Shock-absorbing dampers to minimise noise
- Stitch-elements ensure fast heating and high temperature difference
- Operation mode without heating for protection against outside heat, dust and insects in summer
- Convenient and aesthetic connection to the terminals inside the housing (3kW model includes a power cord with plug)
- Built-in thermostat protects against overheating

## Applications

- Office
- Hospitality
- Retail
- Showroom

## Finish

White or metallic finish

## Installation

Installed horizontally above doorway. Installation height of 2.5m

## Controls

Controls on the body of the air curtain  
Remote control with thermostat

## Specification

To specify state:

Horizontally mounted electric Air Curtain at 3kW, 5.5kW, 6.6kW or 9.8kW output in white finish.

As Smith's Air Curtain S2 3.3kW, 5.5kW, 6.6kW or 9.8kW

Horizontally mounted electric Air Curtain at 3kW, 5.5kW, 6.6kW or 9.8kW output in metallic finish.

As Smith's Air Curtain S2 metallic 3.3kW, 5.5kW, 6.6kW or 9.8kW

# Air Curtains - S2/S2 Metallic Series



Smith's S2 and S2 metallic series of electric air curtains are ideal for smaller commercial spaces such as pavilions, small retail outlets, mini markets and pick-up windows

	HPAC64105 Electric	HPAC64106 Electric	HPAC64109 Electric	HPAC64107 Electric	HPAC64110 Electric	HPAC64108 Electric	HPAC64111 Electric
<b>Heating power, kW</b>	<b>3.3 / 1.6 / 0</b>	<b>5.5 / 2.7 / 0</b>	<b>5.5 / 2.7 / 0</b>	<b>6.6 / 3.3 / 0</b>	<b>6.6 / 3.3 / 0</b>	<b>9.8 / 4.9 / 0</b>	<b>9.8 / 4.9 / 0</b>
Capacity, m <sup>3</sup> /h	350	450	450	700	700	1 050	1 050
Maximum installation height, m	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Supply voltage, V	230	230	230	230	230	415 (3 phase)	415 (3 phase)
Air temperature increase, °C	26 °C	34 °C	34 °C	26 °C	26 °C	26 °C	26 °C
Device dimensions (WxHxD), mm	585x150x155	800x150x155	800x150x155	1080x150x155	1080x150x155	1570x150x155	1570x150x155
Package dimensions (WxHxD), mm	630x165x185	860x165x185	860x165x185	1180x165x185	1180x165x185	1655x165x185	1655x165x185
Product colour	White	White	Metallic	White	Metallic	White	Metallic

## Ordering guide

Description	Net Wt (Kg)	Product Codes
<b>Electric</b>		
S2 E3	4.5	HPAC64105
S2 E5	6.8	HPAC64106
S2 E5M	6.8	HPAC64107
S2 E7	8.4	HPAC64108
S2 E7M	8.4	HPAC64109
S2 E10	12.6	HPAC64110
S2 E10M	12.6	HPAC64111

As part our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated.