

Caspian® UV

One heating solution, suitable for high, low or ceiling mounted applications



Features

- Caspian fan convectors are both a practical and high quality heating solution for any commercial project
- Incorporating the latest EC motor technology, which can result in running-cost savings as high as 80%, and with variable speed control as standard, the Caspian delivers heat quickly and quietly. AC motor models are available on request
- Caspian are compatible with most types of wet central heating systems, functioning equally efficiently with conventional boilers, biomass technology or ground or air source heat pumps
- The airflow can be reversed so that the warm air is discharged from the lower vent

Applications

- Education
- Healthcare
- Places of worship
- Leisure and sport
- Office
- Hospitality
- Retail
- Showroom
- Industrial

Motor

EC (BMS compliant) or AC

Finish

Casing: zinc-coated steel 1.2mm
Polyester powdercoated: white RAL 9010
Available to special order in any colour and with anti-microbial or anti-bacterial paint

Filter

Class G3, 100% polyester, non-washable

Installation

Suitable for two-pipe central heating systems
Maximum installation height for high or ceiling mounting, - 4m to underside
Pipework access holes on the rear and underside
Key operated front access panels
Bleed valve accessible on removal of front casing
Unit must be earthed


Commissioning

Check water is hot enough to activate the low temperature cut-out thermostat

Controls

Variable heat output controller (mounted within the products)

Mounting options

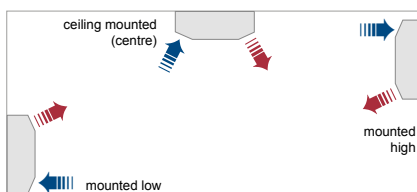

Caspian® UV

One heating solution, suitable for high, low or ceiling mounted applications



Heat output

Model	Heat Output at 80°			Heat Output at 75°			Heat Output at 70°			Heat Output at 65°			Heat Output at 60°		
	Low (kW)	Medium (kW)	High (kW)	Low (kW)	Medium (kW)	High (kW)	Low (kW)	Medium (kW)	High (kW)	Low (kW)	Medium (kW)	High (kW)	Low (kW)	Medium (kW)	High (kW)
CASPIAN UV 60	3.2	4.4	5.9	2.9	4.1	5.3	2.6	3.7	4.8	2.3	3.2	4.2	2.0	2.8	3.6
CASPIAN UV 90	5.2	7.8	10.3	4.8	7.2	9.6	4.4	6.7	8.9	3.9	6.0	8.0	3.5	5.3	7.1
CASPIAN UV 120	6.7	10.7	14.5	6.1	9.7	13.2	5.6	8.7	11.9	4.9	7.7	10.6	4.1	6.8	9.4
CASPIAN UV 150	14.8	15.4	16.2	13.7	14.2	15.2	12.5	13.1	14.0	11.3	11.9	12.8	9.9	10.8	11.6
CASPIAN UV 180	17.2	18.2	19.2	16.2	17.0	18.0	14.9	15.7	16.7	13.6	14.4	15.4	12.4	13.3	14.1

Model	Heat Output at 55°			Heat Output at 50°			Heat Output at 45°			Heat Output at 40°		
	Low (kW)	Medium (kW)	High (kW)	Low (kW)	Medium (kW)	High (kW)	Low (kW)	Medium (kW)	High (kW)	Low (kW)	Medium (kW)	High (kW)
CASPIAN UV 60	1.7	2.4	3.1	1.4	2.0	2.5	1.1	1.5	1.9	0.8	1.0	1.2
CASPIAN UV 90	3.0	4.6	6.2	2.6	3.9	5.3	2.0	3.1	4.1	1.5	2.2	2.9
CASPIAN UV 120	3.4	5.8	8.1	2.7	4.8	6.9	2.0	3.7	5.4	1.3	2.6	3.9
CASPIAN UV 150	8.8	9.7	10.4	7.5	8.2	9.0	6.2	6.9	7.5	4.8	5.4	6.1
CASPIAN UV 180	11.3	12.0	12.8	9.8	10.5	11.2	8.4	9.1	9.4	6.6	7.3	7.8

Heat output testing based on BS EN442 using mean water temperature, 18°C entering air temperature, 10° temperature drop

Model	Flow & return connections	Fused spur	Total Power Consumption				Sound Levels			Casting colour
			Low (Watts)	Medium (Watts)	High (Watts)	Water Capacity (Litres)	High (dBA)	Medium (dBA)	Low (dBA)	
CASPIAN UV 60	22mm	3A	8	24	40	0.92	50	42	33	white
CASPIAN UV 90	22mm	3A	15	43	70	1.50	53	42	34	white
CASPIAN UV 120	22mm	3A	13	62	110	2.08	58	46	35	white
CASPIAN UV 150	22mm	3A	20	144	177	2.58	59	47	36	white
CASPIAN UV 180	22mm	3A	26	124	220	3.18	59	48	38	white

Sound levels measured at 3m in front of the floor mounted model

Correction factors

EAT°C	Mean water temperature °C	
	80 to 40	
15	1.10	
21	0.93	

Factor	Temperature drop °C			
	20	15	10	5
Factor	0.89	0.95	1.00	1.04

How to calculate Mass Flow Rate (L/S)

$$M = H / CP \times (\text{Flow } ^\circ\text{C} - \text{Return } ^\circ\text{C})$$

M = Mass flow rate (L/S)

H = Output of product (W)


CP = Specific heat capacity [J/(kg·°C)]. Varies upon system temperature, Approx. 4187 if fluid is water.

How to calculate Mean Water Temperature (ΔT)

$$\text{Mean water temperature } (\Delta T) = \left(\frac{\text{Flow temperature} + \text{Return temperature}}{2} \right) - \text{Ambient Temperature}$$

Caspian® UV

One heating solution, suitable for high, low or ceiling mounted applications

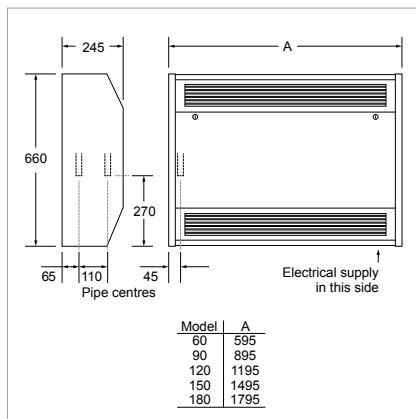

Ordering guide

Model	Packed Wt (kg)	Product Codes
AC Codes		
CASPIAN UV 60 AC	23	HPCA21001
CASPIAN UV 90 AC	36	HPCA21002
CASPIAN UV 120 AC	45	HPCA21003
CASPIAN UV 150 AC	60	HPCA21004
CASPIAN UV 180 AC	78	HPCA21005
EC Codes		
CASPIAN UV 60 EC	23	HPCA20001
CASPIAN UV 90 EC	36	HPCA20002
CASPIAN UV 120 EC	45	HPCA20003
CASPIAN UV 150 EC	60	HPCA20004
CASPIAN UV 180 EC	78	HPCA20005

Specification

To specify state:

Fan Convecter with EC motor (or AC), in 1.2mm zinc coated steel, 660mm high and 595mm, 895mm, 1195mm, 1495mm or 1795mm wide. With variable heat output controller. As Smith's Caspian UV 60/90/120/150/180.

Accessories	Product Codes
CASPIAN UV/LST 60 PLINTH WHITE (150MM)	HACA33006
CASPIAN UV/LST 90 PLINTH WHITE (150MM)	HACA33007
CASPIAN UV/LST 120 PLINTH WHITE (150MM)	HACA33008
CASPIAN UV/LST 150 PLINTH WHITE (150MM)	HACA33009
CASPIAN UV/LST 180 PLINTH WHITE (150MM)	HACA33010
CASPIAN UV/LST 60 PLINTH BLACK (150MM)	HACA33097
CASPIAN UV/LST 90 PLINTH BLACK (150MM)	HACA33098
CASPIAN UV/LST 120 PLINTH BLACK (150MM)	HACA33099
CASPIAN UV/LST 150 PLINTH BLACK (150MM)	HACA33100
CASPIAN UV/LST 180 PLINTH BLACK (150MM)	HACA33101
CASPIAN ADJUSTABLE LOW TEMPERATURE CUT-OUT (EC AND AC)	HACA33001
CASPIAN THERMOSTAT (T1) (EC LOW LEVEL)	HACA33002
CASPIAN THERMOSTAT (T2) (AC LOW LEVEL)	HACA33036
CASPIAN THERMOSTAT (T1) & AUTO-SPEED CONTROL (T2) (AC LOW LEVEL)	HACA33003
CASPIAN EXTERNAL CONTROL HARNESS (EC)	HACA33004
CASPIAN PROPORTIONAL HEAT OUTPUT CONTROLLER 15°-25°C INTEGRAL (EC)	HACA33005
CASPIAN PROPORTIONAL HEAT OUTPUT CONTROLLER 15°-25°C REMOTE SENSOR (EC)	HACA33037
CASPIAN PROPORTIONAL HEAT OUTPUT CONTROLLER 11°-21°C INTEGRAL (EC)	HACA33117
CASPIAN PROPORTIONAL HEAT OUTPUT CONTROLLER 11°-21°C REMOTE SENSOR (EC)	HACA33118
ROOM THERMOSTAT HARD WIRED	HAGA95001
ROOM THERMOSTAT HARD WIRED SIEMENS	HACA33104
ROOM THERMOSTAT RF SIEMENS	HACA33074
ROOM THERMOSTAT TAMPER PROOF SIEMENS	HACA95004
FLEXIBLE HOSES 22MM PAIR	HAGA95003

100mm plinth also available, please contact us for further information

As part our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated.