

# Ecovector® High



The Ecovector Hydronic fan convectors provide effective and dependable heating for both small and large commercial areas, fitted unobtrusively above head height



## Features

- They work particularly well in shops and libraries, where lower wall space is limited
- Compatible with most types of wet central heating systems, functioning equally efficiently with conventional boilers, biomass technology or ground or air source heat pumps
- Supplied as standard in white but casing can be supplied in any colour

## Applications

- Education
- Healthcare
- Places of worship
- Leisure and sport
- Office
- Hospitality
- Retail
- Showroom
- Industrial
- Residential

## Motor

AC only.

## Finish

Front casing: zinc-coated steel.  
Polyester powder-coated RAL 9010.  
Side panels: polymer eggshell white.

## Installation

Maximum installation height 2.1m (6'11") to underside.  
No top or side clearance required.  
Unit must be earthed (except model 1000-12V).  
Suitable for two-pipe central heating systems.  
Patress box not supplied for transformer (model 1000-12V).

## Commissioning

Check water is hot enough to activate the low temperature cut-out thermostat. The inclusion of an automatic air vent at the highest point is recommended to avoid possible air locks.

## Controls

Two rocker switches - normal/off/boost, heating/fan-only  
Low temperature cut out thermostat, set to energise fan at approximately 35°C.


## Specification

To specify state:  
High level hydronic fan convector in white.  
As Smith's Ecovector High 1000/2300/2900/4000/1000-12V.

# Ecovector® High



The Ecovector Hydronic fan convectors provide effective and dependable heating for both small and large commercial areas, fitted unobtrusively above head height

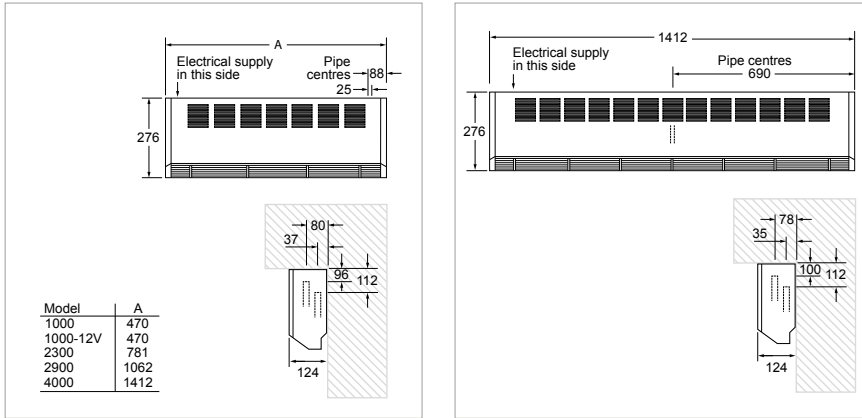

## Heat output

Model	Room size guide* (m²)	Heat Output at 80°		Heat Output at 75°		Heat Output at 70°		Heat Output at 65°		Heat Output at 60°	
		Normal (kW)	Boost (kW)	Normal (kW)	Boost (kW)	Normal (kW)	Boost (kW)	Normal (kW)	Boost (kW)	Normal (kW)	Boost (kW)
ECOVECTOR HL 1000	29	1.0	1.3	1.0	1.2	0.9	1.1	0.8	1.0	0.7	0.9
ECOVECTOR HL 2300	66	2.3	3.1	2.1	2.8	1.9	2.5	1.7	2.1	1.4	1.9
ECOVECTOR HL 2900	-	2.9	4.2	2.7	4.0	2.5	3.5	2.3	3.2	2.1	2.9
ECOVECTOR HL 4000	-	4.0	5.3	3.7	4.8	3.3	4.4	3.0	4.1	2.7	3.4
ECOVECTOR HL 1000-12V	25	1.0	1.3	1.0	1.2	0.9	1.1	0.8	1.0	0.7	0.9

Model	Room size guide* (m²)	Heat Output at 55°		Heat Output at 50°		Heat Output at 45°		Heat Output at 40°	
		Low (kW)	Medium (kW)	Low (kW)	Medium (kW)	Low (kW)	Medium (kW)	Low (kW)	Medium (kW)
ECOVECTOR HL 1000	29	0.6	0.8	0.5	0.7	0.5	0.6	0.4	0.5
ECOVECTOR HL 2300	66	1.4	1.8	1.2	1.6	1.1	1.4	0.9	1.2
ECOVECTOR HL 2900	-	1.9	2.6	1.6	2.3	1.4	2.0	1.2	1.7
ECOVECTOR HL 4000	-	2.4	3.2	2.1	2.8	1.8	2.5	1.6	2.1
ECOVECTOR HL 1000-12V	25	0.6	0.8	0.5	0.7	0.5	0.6	0.4	0.5

Model	Flow & return connections	Mains cable	Transformer	Fused spur	Total Power Consumption		Water Capacity (Litres)	Sound Levels		Casting colour	Fan-only
					Normal (Watts)	Boost (Watts)		Normal (dBA)	Boost (dBA)		
ECOVECTOR HL 1000	15mm	1.5m	n/a	3A	20	25	0.28	32	40	white	•
ECOVECTOR HL 2300	15mm	1.5m	n/a	3A	20	32	0.32	34	50	white	•
ECOVECTOR HL 2900	15mm	1.5m	n/a	3A	33	50	0.52	37	51	white	•
ECOVECTOR HL 4000	22mm	1.5m	n/a	3A	40	60	1.04	39	52	white	•
ECOVECTOR HL 1000-12V	15mm	0.45m	•	3A	20	25	0.28	32	39	white	•

\*Room sizes given in cubic metres for general guidance only based on normal heat output (80°C) for domestic applications - always calculate heat losses. Heat outputs tested in accordance with BS4856 using entering water temperature and 340 l/h (75gph) flow rate. Fan-only option operational only when central heating system is switched off. Sound levels measured at 1.5m.

# Ecovector® High



The Ecovector Hydronic fan convectors provide effective and dependable heating for both small and large commercial areas, fitted unobtrusively above head height

## Ordering guide

Model	Packed Wt (kg)	Product Codes
ECOVECTOR HL 1000 AC	7	HPEV50011
ECOVECTOR HL 2300 AC	11	HPEV50012
ECOVECTOR HL 2900 AC	15	HPEV50013
ECOVECTOR HL 4000 AC	18	HPEV50014
ECOVECTOR HL 1000-12V AC	8	HPEV50015
<b>Accessories</b>		
ROOM THERMOSTAT HARD WIRED		HAGA95001
ROOM THERMOSTAT HARD WIRED SIEMENS		HACA33104
ROOM THERMOSTAT RF SIEMENS		HACA33074
ROOM THERMOSTAT TAMPER PROOF SIEMENS		HAGA95004

As part of our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated. Please visit our website for the most up to date information.

Issue 003 | July 2020