


Electric Heating

Ensure the upper rocker switch is to the left (red), the middle rocker switch to the right (electric heating) and the lower rocker switch to the left (normal) and your Space Saver will switch on. Moving the lower rocker switch to boost will not increase the heat output. Moving the upper rocker switch to its centre position will turn off the Space Saver.

For your safety this Space Saver heater is fitted with automatic overheat protection. If the heater stops, turn off the power at the fused spur, wait 5 minutes and switch the power back on.

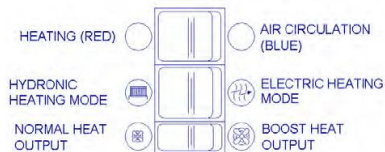

Approved CQS ISO9001: 2008



Products with this symbol (crossed out wheelie bin) cannot be disposed as household waste. Old electrical and electronic equipment must be recycled at a facility capable of handling these products and their waste by-products. If you are purchasing replacement equipment your retailer may offer a 'take back' scheme, or will be able to give details of the nearest approved authorised treatment facility. Proper recycling and waste disposal will help conserve resources whilst preventing detrimental effects on our health and the environment.

WEEE Registered Code:

WEE/ED0093VW

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.



Smith's Environmental Products Ltd

Blackall Industrial Estate, South Woodham Ferrers, Chelmsford, Essex, CM3 5UW
Tel: 01245 324900 Fax: 01245 324422

Sales: sales@SmithsEP.co.uk General Information E-mail: info@SmithsEP.co.uk Web: www.SmithsEP.co.uk


For Ireland, contact MT Agencies (Ireland) Ltd on Tel: 00353 1 844 3212

As part of the policy of continuous product improvement, Smith's Environmental Products Ltd reserves the right to alter specification without prior notice.

SS5 /Dual Space Saver

Installation and User Guide

Discover the hidden benefits

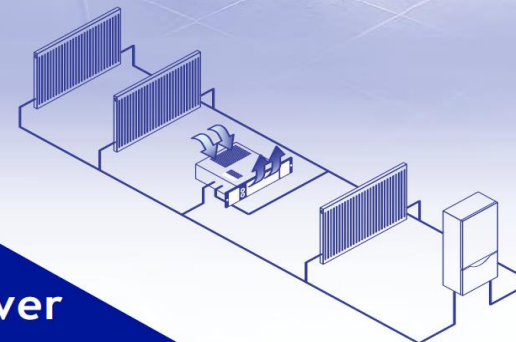

Space Saver



User information:

Cleaning and user maintenance shall not be made by children without supervision

Children of less than 3 years should be kept away unless continuously supervised

Children aged from 3 years and less than 8 years shall only switch on/off the appliance provided that it has been placed or installed in its intended normal operating position and they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children aged from 3 years and less than 8 years shall not plug in, regulate and clean the appliance or perform user maintenance.

CAUTION — Some parts of this product can become very hot and cause burns. Particular attention has to be given where children and vulnerable people are present.

NOTES

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

Heat Output Performance

It is recommended that the Space Saver model chosen is capable of maintaining the calculated heat loss at normal heat output (I) enabling the boost setting (II) to be used for faster heat up.

Model	Heat Output at 80°C		Heat Output at 70°C		Heat Output at 60°C		Heat Output at 50°C		Heat Output at 40°C	
	Normal KW (BTU)	Boost KW (BTU)	Normal KW (BTU)	Boost KW (BTU)	Normal KW (BTU)	Boost KW (BTU)	Normal KW (BTU)	Boost KW (BTU)	Normal KW (BTU)	Boost KW (BTU)
SS5/Dual	1.3 (4400)	1.7 (5800)	1.1 (3800)	1.4 (4700)	0.9 (3100)	1.1 (3800)	0.7 (2400)	0.9 (3100)	0.5 (1700)	0.7 (2400)

Notes:

Dual models include an electric element which in electric heating mode will emit 1kW of heat.

Heat outputs tested in accordance with BS 4856 using entering water temperature. Fan-only option operational only when central heating system is switched off.

Heat output data for all water temperatures between 80°C and 40°C is available on our website www.smiths-env.com. Refer to the data sheet in the download section.

Fault Finding


- | | |
|---|--|
| <p>1. Fan does not run on any switch setting or no heat output on electric heating mode.</p> | <p>a. Check the power supply is switched ON.</p> <p>b. Check the fuse in the fused spur.</p> <p>c. Check the wiring connections at the fused spur.</p> |
| <p>2. No heat output on hydronic heating mode.</p> | <p>a. Check the power supply is switched ON.</p> <p>b. If fitted, ensure the room thermostat is calling for heat.</p> <p>c. Balance the central heating system if installed on the same circuit as panel radiators and increase the circulating pump speed if required.</p> <p>d. Increase the boiler water temperature.</p> |
| <p>3. If the overheat protection has activated on electric heating mode, manually reset as follows.</p> | <p>a. Switch the power supply OFF at the fused spur.</p> <p>b. Wait five minutes for the overheat cut off switch to reset and then switch the power supply ON.</p> |

In the event of any difficulty, please contact us on 01245 324560. It will be more helpful if you do remove the product from the central heating system.


Commissioning

1. Turn on the electrical supply at the fused spur.
2. Set the upper rocker switch on the fascia grille to the right (blue_) and the lower switch to the left or right - the fan should run.
3. Set the upper rocker switch to the left (red) and the middle rocker switch to the right (electric heating). Heat will start to flow immediately. Increasing the fan speed will not increase the heat output in the electric heating mode.
4. Turn on the central heating system.
5. Set any room thermostat/s to maximum.
6. Set the upper rocker switch to the left (red), the middle rocker switch to the left (hydronic heating) and the lower switch to the left (normal output). The fan should run and heat will flow within a few minutes.
7. Balance the central heating system if Space Saver is installed on the same circuit as panel radiators.
8. When the installation is working correctly, remember to reset any thermostat/s to there normal setting.

5. Position heater, making sure the flexible hoses are not kinked and the electrical cable is not snagged.

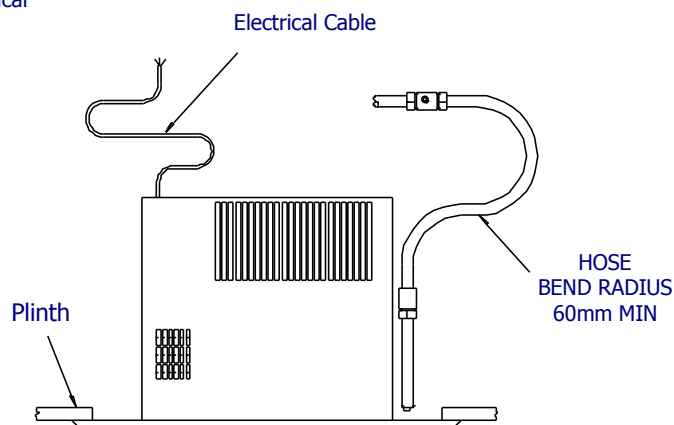

6. Fix assembled heater to plinth using fixing screw holes located at either ends of grille.

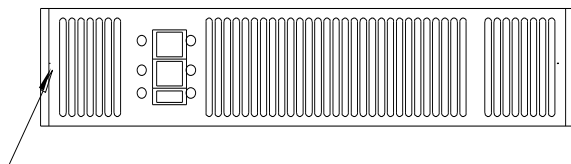

Grille to plinth securing screws

SS5 /Dual

The following items should be included in the carton:

- ❖ Product complete with Stainless steel grille (please remove protective film before installation) and pre-wired mains cable.
- ❖ Fixing screws (2).
- ❖ One pair flexible installation hoses.

Accessory grilles which fit in place of the standard grille are available in different colours and finishes. Please consult the price list for details. In the event of any items missing or visible damage, please contact us on 01245 324560.

We would be most grateful if you would leave this Installation & User Guide and the Guarantee Registration Card with the owner of the property.

Space Saver is primarily intended for installation in the space beneath kitchen cupboards behind the plinth. However it can also be installed in similar applications such as stair risers and other built-in furniture.

This Space Saver model must not be installed in a bathroom or other high humidity areas. Please contact us on 01245 324560 for details of products suitable for these applications.

Space Saver is designed for use on standard two-pipe pumped central heating systems. Pipes are 15mm and either may be used as flow or return. This product is not suitable for one-pipe systems.

Space Saver is classed as a fixed appliance and electrical connection should be via a double pole 5A fused spur with a minimum contact gap of 3mm. The fused spur must not be directly above the heater but should be accessible after completion of the installation. If the pre-wired mains cable is damaged, it must be replaced by either the manufacturer, its service agent or similar qualified persons. The appliance must be earthed.

Space Saver is fitted with overheat protection. When operating in electric heating mode the heater will

automatically stop in the event of the heating element reaching the cut out temperature.

To ensure adequate airflow, a minimum clearance of 20mm between the top of the product and any shelving is essential.

To avoid the possibility of vibration, this product must be installed on a flat even surface.

There must be **no** rear access to the product after completion of the installation.

To conform with Building Regulations Part L (Part J in Scotland), a remote room thermostat (Smith's Part No. RT002) can be used in conjunction with this Space Saver fan convector.

The flexible installation hoses supplied are suitable for use with either 15mm diameter copper pipe or 15mm cross-linked polythene barrier pipe to BS7291. For all other types of pipe recommend the use of compression type fittings.

Please note the guarantee may be invalidated if this product is not installed and used in accordance with this guide.

User Guide

SS5 /Dual


User Information

- ❖ Your product is covered by a **free 5-year parts and labour guarantee**; please complete and return the Guarantee Registration Card to us as soon as possible to ensure that should you require assistance, we can help you quickly and more efficiently.
- ❖ Your Space Saver fan convector is designed to operate as part of your central heating system in the same way as a panel radiator. Providing you leave Space Saver in hydronic heating mode, it will switch on and off automatically with your central heating system.

How your Space Saver fan convector work

Hot water from your central heating system passes through a heat exchanger transferring its heat to the aluminium fins. Cooler air is drawn in by the fan and heated as it passes through the heat exchanger before being discharged gently back into the room. This not only gives a more even temperature spread, but will heat up a room in less than half the time of a traditional panel radiator.

A supplementary electric heating element allows you heat when the central heating is switched off. Please note that if your central heating comes on while the Space Saver is switched to electric heating mode, the element will automatically switch off. Using Hydronic heating mode where possible will considerably reduce running costs.

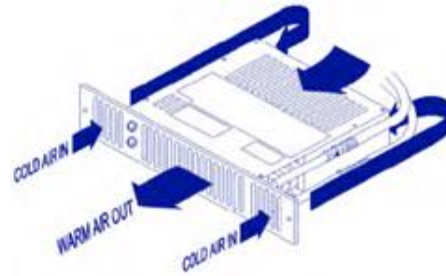

Space Saver includes an internal thermostat that prevents the fan from operating until the central heating system water passing through the heat exchanger reaches 38°C. This prevents Space Saver circulating cooler air at start up.

Hydronic Heating

Ensure your central heating system is on. Check the upper rocker switch is to the left (red), the middle rocker switch to the left (hydronic heating) and the lower rocker switch either to the left (normal) or right (boost). Providing the water temperature in the system is more than 38°C and the thermostat controlling your central heating system is calling for heat, your Space Saver will switch on. Moving the upper rocker switch to its Centre position will turn off the Space Saver

Air Circulation (summer use)

Ensure your central heating is off. Check the upper rocker switch is to the right (blue), the middle rocker switch to the left or right and the lower rocker switch either to the left (normal)

Fault Finding


This Space Saver is covered by a free 5-year parts and labour guarantee. Please refer to the Fault Finding section on page 5 for advice. In the event of difficulty, please contact us on 01245 324560. It will be helpful if you do not disconnect the Space Saver from the central heating system.

or right (boost). Space Saver will provide a cooling flow of air. If used in conjunction with a room thermostat, ensure the thermostat is set to maximum.


1. We recommend the use of a kneepad when installing this product. Cut the opening in the plinth to the size shown in the table. Use Method A or B.

Model	Width A	Height B*
SS5 /Dual	465mm	96mm


* The overall height of the grille is 100mm. Use care when cutting the opening.

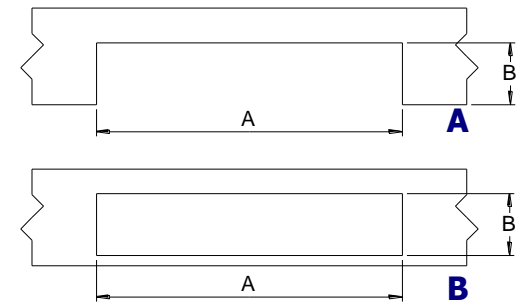


2. Fit isolating valves (not supplied) to the system flow and return pipes where they will be accessible after the installation is complete. *Failure to fit isolating valves may mean that the product is not serviceable in the event of failure*, Where supplied Connect the flexible hoses to the supply pipework flow and return isolating valves using a section of suitable 15mm pipework (either pipe may be used for flow or return) and then to the flow and return pipework on the heater. Open the isolating valves and check for leaks.

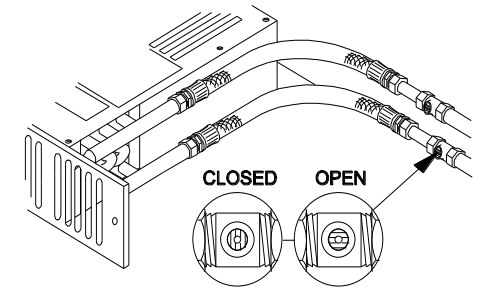

3. Vent air through the bleed screw.

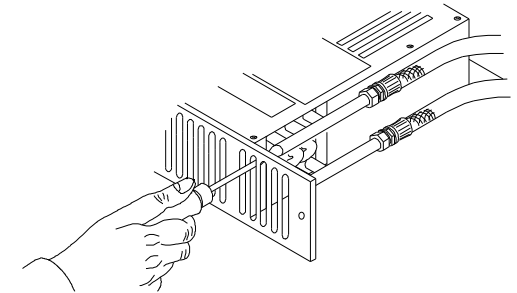

4. Isolate electrical supply and connect the heater electric cable to the fused spur (5A). Ensure the fused spur is not directly above the heater and is accessible after installation is complete.

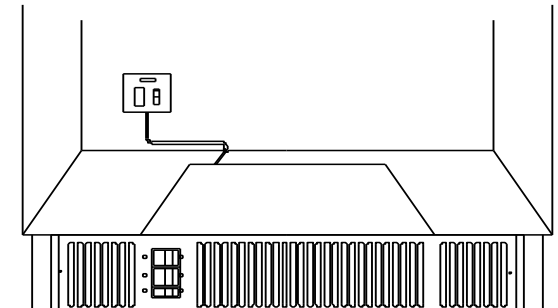

Guarantee Statement

Thank you for purchasing a Smith's heater.

It has been designed and manufactured to the highest quality standards to ensure it gives you efficient and trouble-free service for many years.

To back up our commitment, included with your product is a **free five year parts and labour guarantee.**

This gives you peace of mind that in the unlikely event of the product failing within the first five years, we will repair or replace the product completely free of charge provided the product has been installed, used and maintained in accordance with the instructions.

It is important to register within 7 days. This will ensure you receive a prompt and efficient service, if your product requires attention within the guarantee period. If you do not register your product, you will be required to produce a proof of purchase prior to receiving this service.

If you experience any problems with the use of your product, please contact our **after-sales office** on 01245 324560.

Smith's Environmental Products Ltd manufactures a complete range of heaters for domestic and commercial applications.


If you require any further information, please contact us on **01245 324900** or visit our website at **www.SmithsEP.co.uk**

Your statutory rights are not affected by this guarantee.

Please pull this Registration card from the booklet and fill in all parts and return.



please fold along here



Smith's Environmental Products Ltd

Units 1 & 2 Blackall Industrial Estate

Hamberts Road

South Woodham Ferrers

Chelmsford

Essex

CM3 5UW

**Please
affix
stamp
here**

**Guarantee Registration Card
& Customer Satisfaction Survey**

Dear Customer

We hope our product suits all your requirements; it would help us immensely if you could find the time to fill in this form, your response will help us maintain the quality standards we all expect in today's climate.

Customer name _____ Date ____/____/____

Email Address _____@_____

Product Name _____

Tick as appropriate

	V Good	Good	Fair	Poor
Product	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Delivery	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sales & Ordering	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Response to any problems	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Comments _____

Thank you for your time to fill in this survey, the response will help us to serve your needs more effectively. Please return by fax to 01245324422.

Quality Control Manager: Ron Brown ron.brown@smithsep.co.uk

User Details

User Name Mr/Mrs/Miss/Ms/Other

Initials Surname

Address

.....

..... Post Code:

Telephone:

Product & Model installed (e.g. Space Saver SS5)

.....

Room Installed (e.g. Kitchen):

Your details will only be held by Smiths Environmental Products Ltd and used solely to provide customer services and product information.
 If you do not wish to be contacted, please put an x in the box.

Installer Details

Company name:

Principal contact: Mr/Mrs/Miss/Ms/Other:

Initials: Surname:

Address:

.....

..... Post Code:

Telephone:

Date of installation/...../.....

Room Installed (e.g. Kitchen):

Your details will only be held by Smiths Environmental Products Ltd and used solely to provide customer services and product information.
 If you do not wish to be contacted, please put an x in the box.